



Corporation TRIMMER , Russia [www.trimmer.ru](http://www.trimmer.ru)

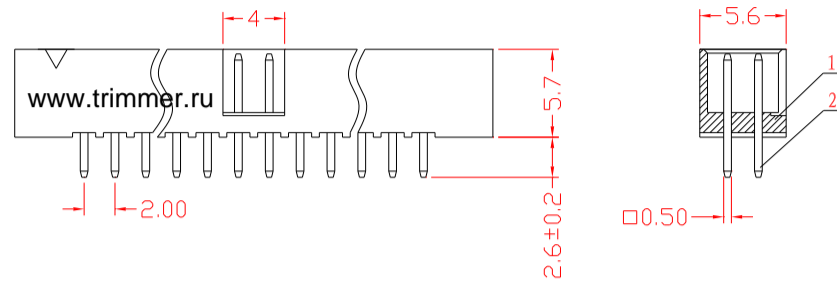

Corporation TRIMMER , Russia [www.trimmer.ru](http://www.trimmer.ru)

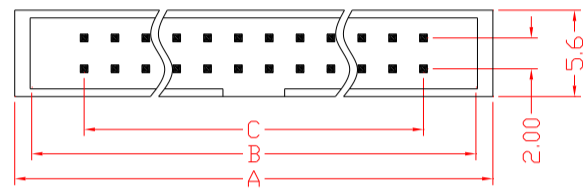

**Specifications:**

Contact Resistance: 30mΩ max.at DC 100 mA  
 Insulator Resistance: 1000MΩ min.at DC 500V  
 Current Rating: 1AMP

Corporation TRIMMER , Russia [www.trimmer.ru](http://www.trimmer.ru)

Dielectric Withstanding  
 Voltage: AC 1000V For 1 minute  
 Operating Temperature: -55°C- +105°C  
 Contact: Brass

Housing: PBT &30% Glass Fiber (UL 94V-0)

Position	A	B	C
10	17.2	16.1	8
12	19.2	18.1	10
14	21.2	20.1	12
16	23.2	22.1	14
20	27.2	26.1	18
26	33.2	32.1	24
30	37.2	36.1	28
34	41.2	40.1	32
40	47.2	46.1	38
50	57.2	56.1	48
60	67.2	66.1	58
64	71.2	70.1	62

BH2-10 , BH2-14 , BH2-16 , BH2-20 , BH2-26 , BH2-30 . BH2-34 , BH2-40, BH2-50, BH2-60.