



Corporation TRIMMER , Russia www.trimmer.ru

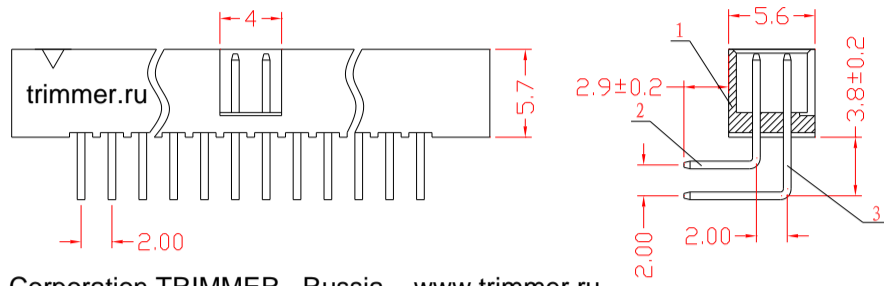

Corporation TRIMMER , Russia www.trimmer.ru

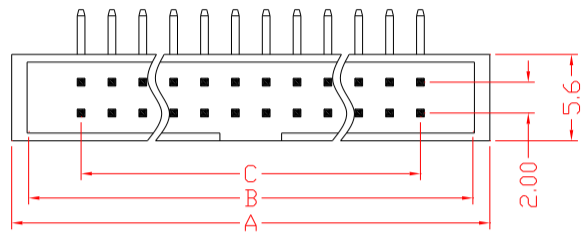

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Corporation TRIMMER , Russia www.trimmer.ru

Dielectric Withstanding

Voltage: AC 1000V For 1 minute

Operating Temperature: -55°C- +105°C

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

Position	A	B	C
10	17.2	16.1	8
12	19.2	18.1	10
14	21.2	20.1	12
16	23.2	22.1	14
20	27.2	26.1	18
26	33.2	32.1	24
30	37.2	36.1	28
34	41.2	40.1	32
40	47.2	46.1	38
50	57.2	56.1	48
60	67.2	66.1	58
64	71.2	70.1	62

BH2-10R , BH2-14R, BH2-16R , BH2-20R , BH2-26R , BH2-30R , BH2-40R