




Corporation TRIMMER , Russia www.trimmer.ru

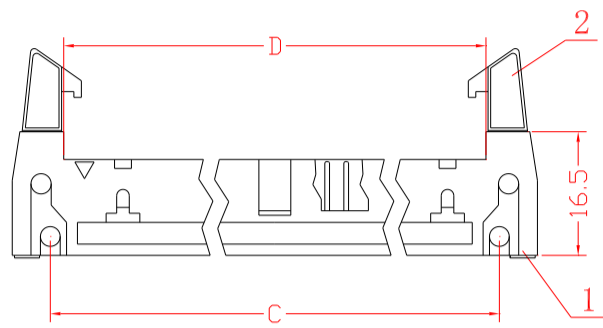

Corporation TRIMMER www.trimmer.ru

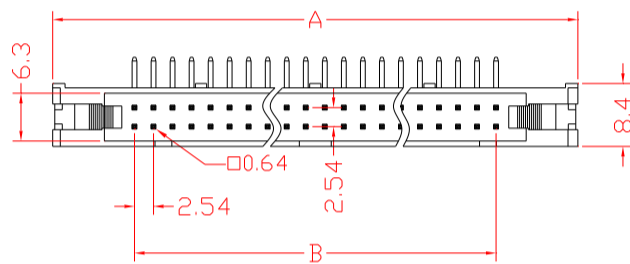

Specifications:

Contact Resistance:30mΩ max.at DC 100 mA
 Insulator Resistance:1000MΩ min.at DC 500V
 Current Rating:1AMP

Corporation TRIMMER www.trimmer.ru

Dielectric Withstanding
 Voltage:AC 500V For 1 minute
 Operating Temperature:-55° C--+105° C
 Contact:Brass
 Housing:PBT &30% Glass Fiber(UL 94V-0)

Position	A	B	C	D
10	32.00	10.16	21.84	17.96
12	34.54	12.70	24.38	20.50
14	37.08	15.24	26.92	23.04
16	39.62	17.78	29.46	25.58
20	44.70	22.86	34.54	30.66
26	52.32	30.48	42.16	38.28
30	57.40	35.56	47.24	43.36
34	62.48	40.64	52.32	48.44
40	70.10	48.26	59.94	56.60
50	82.80	60.96	72.64	68.76
60	95.50	73.66	85.34	81.46
64	100.58	78.74	90.42	86.54

SCM-10R , SCM-12R , SCM-14R , SCM-16R , SCM-20R ,SCM-26R ,SCM-30R, SCM-40R , SCM-50R , SCM-60R .