

Features:


- Multi-turn cermet trimmer.
- Higher rated power thanks to the use of cermet resistor element.
- Cut-off structure offers excellent overall characteristics.
- Only 5mm thickness for board space saving.
- Excellent reliability for heat and humidity.
- Tighter resistance tolerances available.





3296P

| | |
|--|-------------------------------------|
| Standard Resistance Range | 50Ω~2MΩ |
| Resistance Tolerance | ±10% (tighter % available) |
| Absolute Minimum Resistance | 1% or 10Ω (whichever is greater) |
| Contact Resistance Variation | 1% or 5Ω (whichever is greater) |
| Rotational Noise (method B for IEC) | ≤3% or 5Ω (Select the bigger) |
| Resistance Temperature Coefficient | 100ppm/°C |
| Rotational Life | 200 cycles |
| Total Angle of Mechanical Rotation | 28 ± 2 Circle |
| Starting Torque | 3-35mN.m |
| Power Rating (315 volts max.) | 0.5W @ 70°C |
| | 0W @ 125°C |
| Withstand Voltage | 640V AC 1min |

Dimensions:

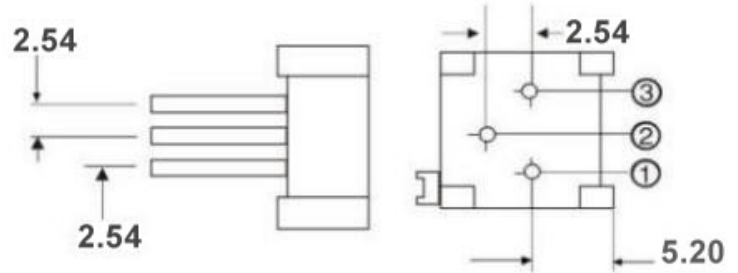

Common Dimensions:

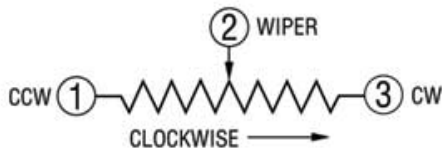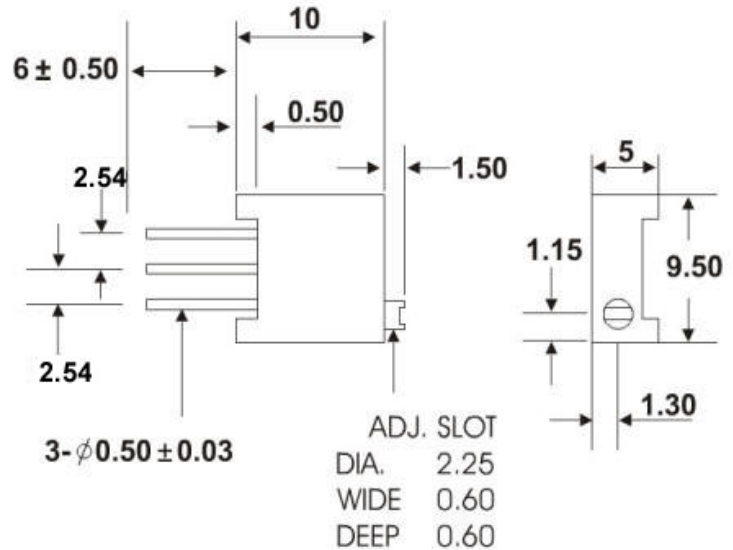

| Resistance Code | Resistance (Ohms) |
|-----------------|-------------------|
| 500 | 50 |
| 101 | 100 |
| 201 | 200 |
| 501 | 500 |
| 102 | 1000 |
| 202 | 2000 |
| 502 | 5000 |
| 103 | 10000 |
| 203 | 20000 |
| 253 | 25000 |
| 503 | 50000 |
| 104 | 100000 |
| 204 | 200000 |
| 254 | 250000 |
| 504 | 500000 |
| 105 | 1000000 |
| 205 | 2000000 |

Part Numbering System

