
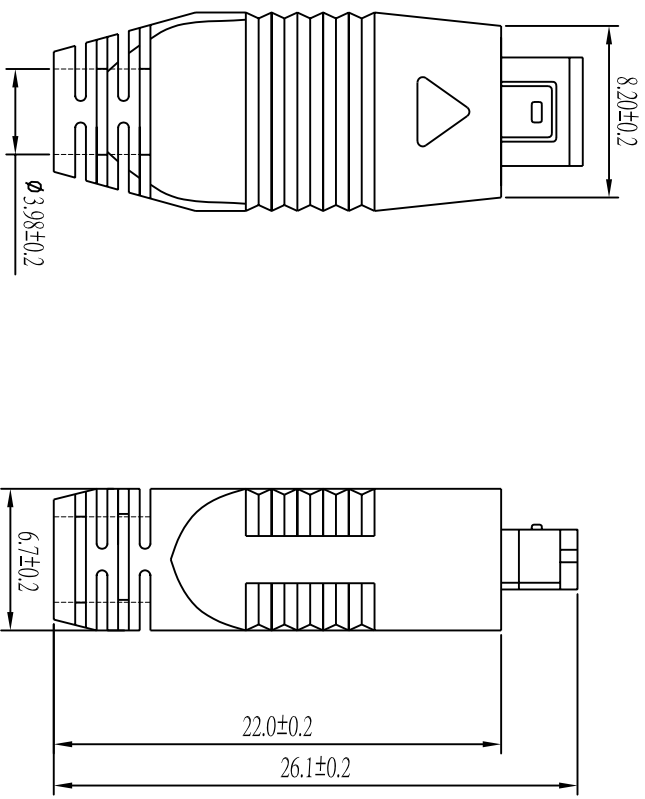


REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVSER	APPD

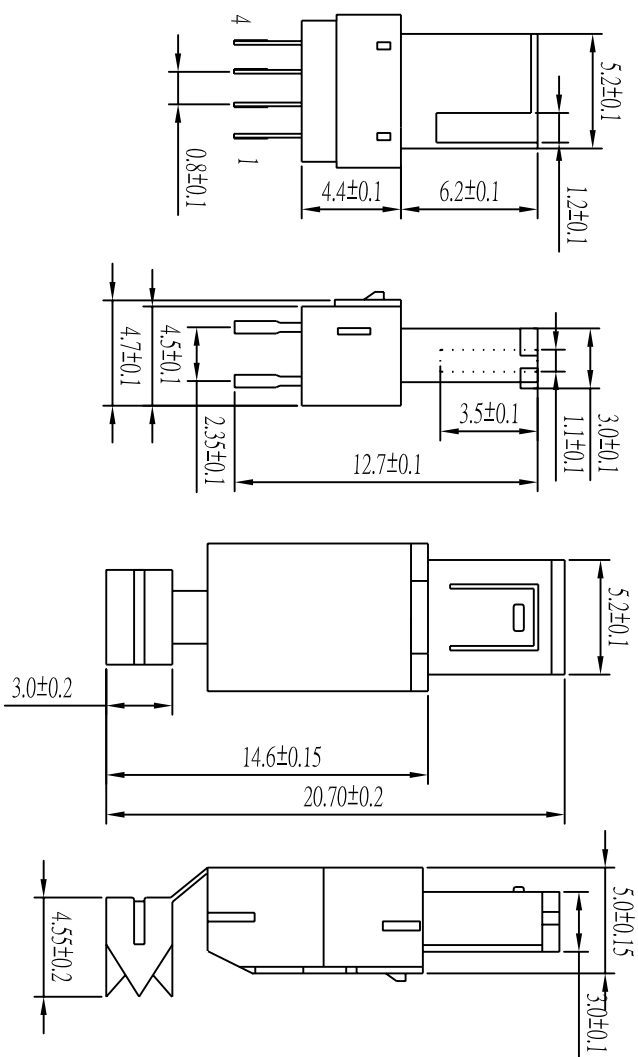

Note:  
1.Material:  
1.1 Insulator: High temperature thermoplastic with g.f.UL94v-0  
1.2 Contact: Copper alloy,t=0.25mm  
1.3 Shell: Spcc,t=0.20mm

2.Specification:  
2.1 Current rating: 1 A Max.  
2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.  
2.3 Contact resistance: 30 mΩ Max.  
2.4 Insulation resistance: 1000 MW Min.  
2.5 Total mating force: 2.5 Kgf Max.  
2.6 Total unmating force: 0.5 Kgf Min.  
2.7 Temperature range: -55C~85C

No.	Name	Qty	Part No.	Finish
8	Back-shell			
7	Front-shell			
6	Clip			No finish
5	Contact			
4	Contact			
3	Contact			Selective Au plated on mating area
2	Contact			
1	Housing			Black

PART NO:	MATERIAL:
MODEL NO:	FINSH:
UNIT: mm	SIZE:
TOLERANCE UNSPECIFIED	COLOR:
.x ±0.3	DR:
.xx ±0.20	CHK:
.xxx ±0.100	APP: 1
ANG. ±1°	SCALE: 2:1
	SHEET: 1 of 1
	REV: A0

PART NAME:  
MINTUSB-A(HRS)TYPE(D)ASSEMBLY

DWG NO: HC-005

