
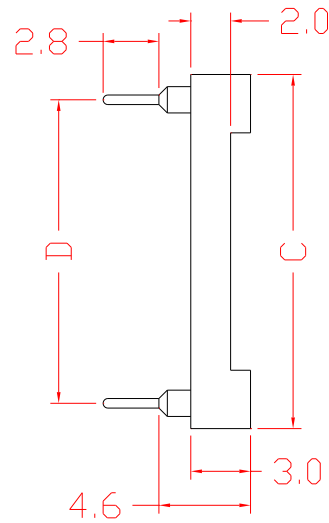


Corporation TRIMMER www.trimmer.ru

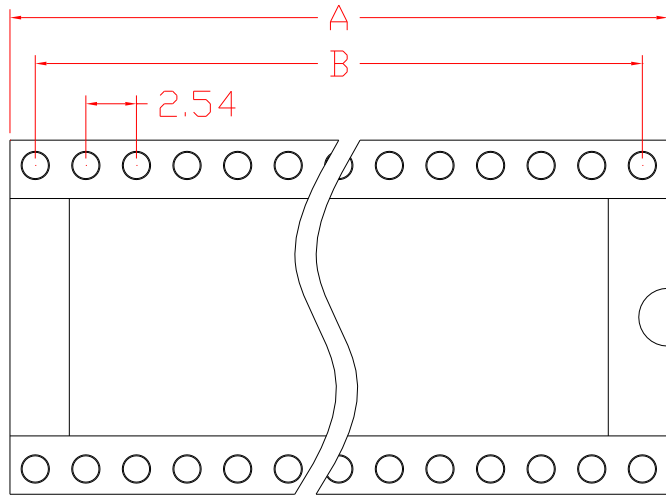

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Current Rating: 1AMP

Corporation TRIMMER www.trimmer.ru

Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature:-55°C--+105°C

Contact: Phosphor bronze

Housing: PBT &30% Glass Fiber(UL 94V-0)

Position	Dimension			
	A	B	C	D
6	7.52	7.62	10.16	7.62
8	10.16	7.62	10.16	7.62
14	17.82	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	10.16	7.62
28	35.56	33.02	17.78	15.24
40	50.80	48.26	17.78	15.24

Corporation TRIMMER www.trimmer.ru

